



3 Motor Gynaecological Examination Couch

Strength, precision & elegance combined

Technical Specifications

- Electrically operated height, trendelenburg/reverse trendelenburg and backrest with a hand control.
- Extremely stable, smooth operation.
- Waterproof faux leather.
- Paper roll holder

Dimensions:

Length: MIN:1650-MAX:1810 MM
 Width (Excluding Railing): 700 MM
 Width (Including Railing): 800 MM
 Height: MIN: 525-MAX: 960 MM

Backrest: $0^{\circ} - 85^{\circ} \pm 1^{\circ}$
 Trendelenburg: $0^{\circ} - 16^{\circ} \pm 1^{\circ}$
 Reverse Trendelenburg: $0^{\circ} - 4^{\circ} \pm 1^{\circ}$
 Castors Diameter: 50MM



Load Capacity: 240 KG
 Safe Working Capacity: 240 KG



Gynae stirrups



Knee Troughs



Retractable Castors



Stainless Tray



Grip Arm




Fold down cot sides









3 Motor Gynaecological Examination Couch

Strength, precision & elegance combined

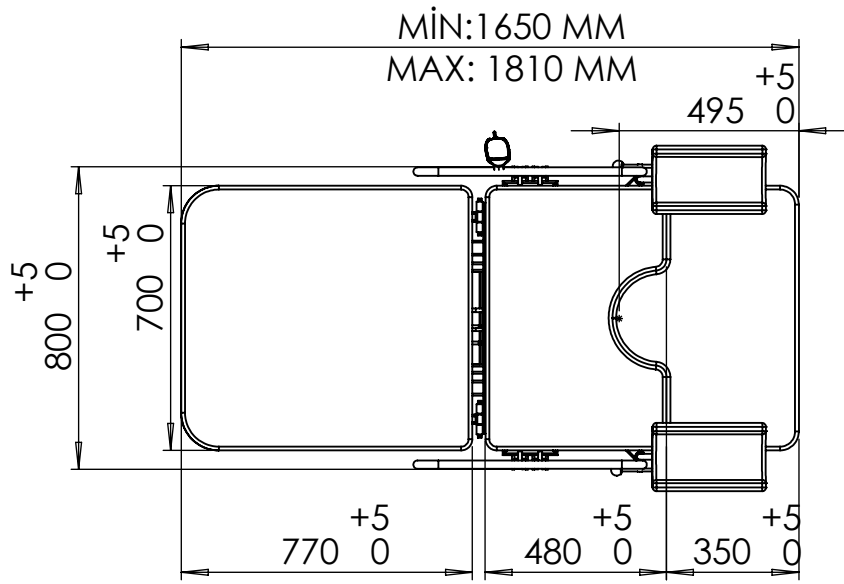

REVİZYON BİLGİLERİ		
TARİH	TANIM	SORUMLU

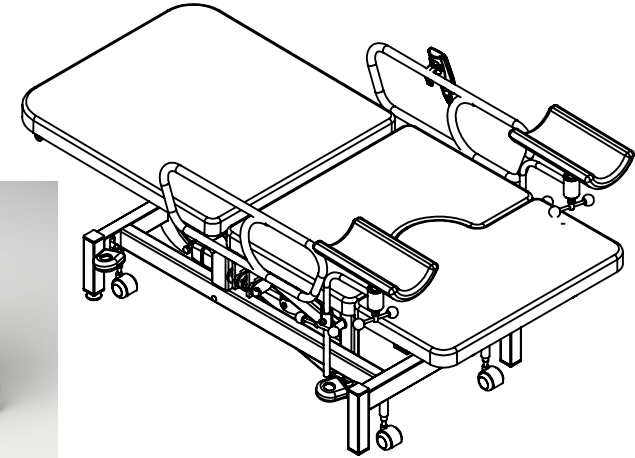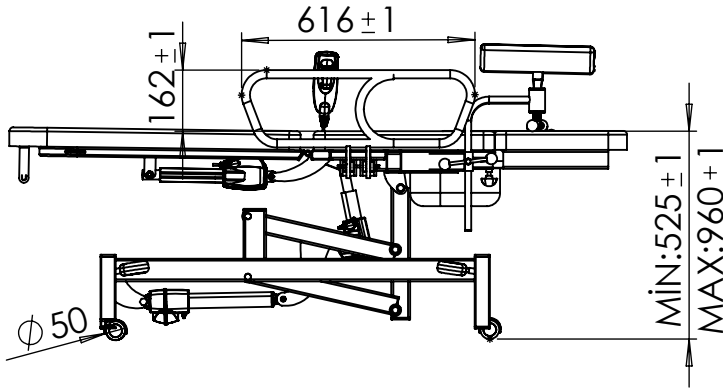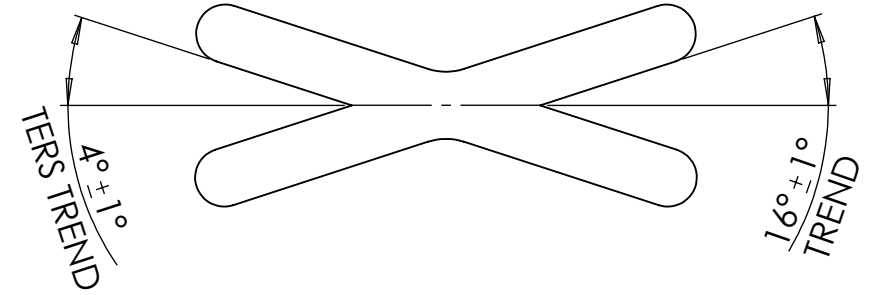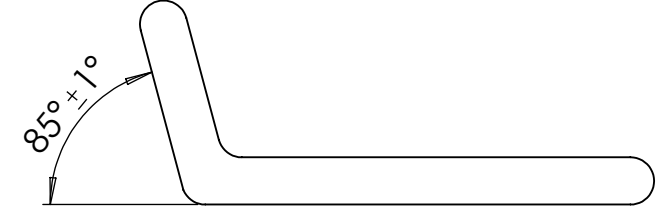

MALZEME	EBAT	UZUNLUK	1 TAKIM ADET	OPERASYON 1	OPERASYON 2	OPERASYON 3		Çizen :	PARÇA NO	
								Onay :		
								PARÇA TANIMI: ANA FİRMA KODU:		
RAL KODU	TÜM ÖLÇÜLER MM DİR.S.LAZER VE P.LAZER DATALARI DXF/DWG STEP203/İGES FORMATINDADIR RESİMLER KONTROL AMAÇLIDIR"				Resimdeki şüphe halinde AR-GE birimi ile iletişime geçiniz		<i>Tolerans çizimde belirtilmiştir verilmediği takdirde 0,2 mm dir keskin köşelerden pah kırılacaktır</i> 	TİME ETÜD VERİSİ	Çizim Tarihi	



Tolerans çizimde belirtilmiştir
verilmediği takdirde 0,2 mm dir
keskin köşelerden pah kırılacaktır

